



THE INFORMATION CONTAINED HEREIN IS THE PROPERTY OF A D METRO. IT IS TO BE USED ONLY FOR THE PROJECT AND SHEET SPECIFICALLY IDENTIFIED HEREIN. ANY REUSE OR MODIFICATION OF THIS INFORMATION WITHOUT THE WRITTEN PERMISSION OF A D METRO IS STRICTLY PROHIBITED.

REVISIONS			
LET	DESCRIPTION	DATE	BY
A	INITIAL RELEASE	12-23-09	DZ
B	ADD NOTE RE: AG	01-17-10	DZ

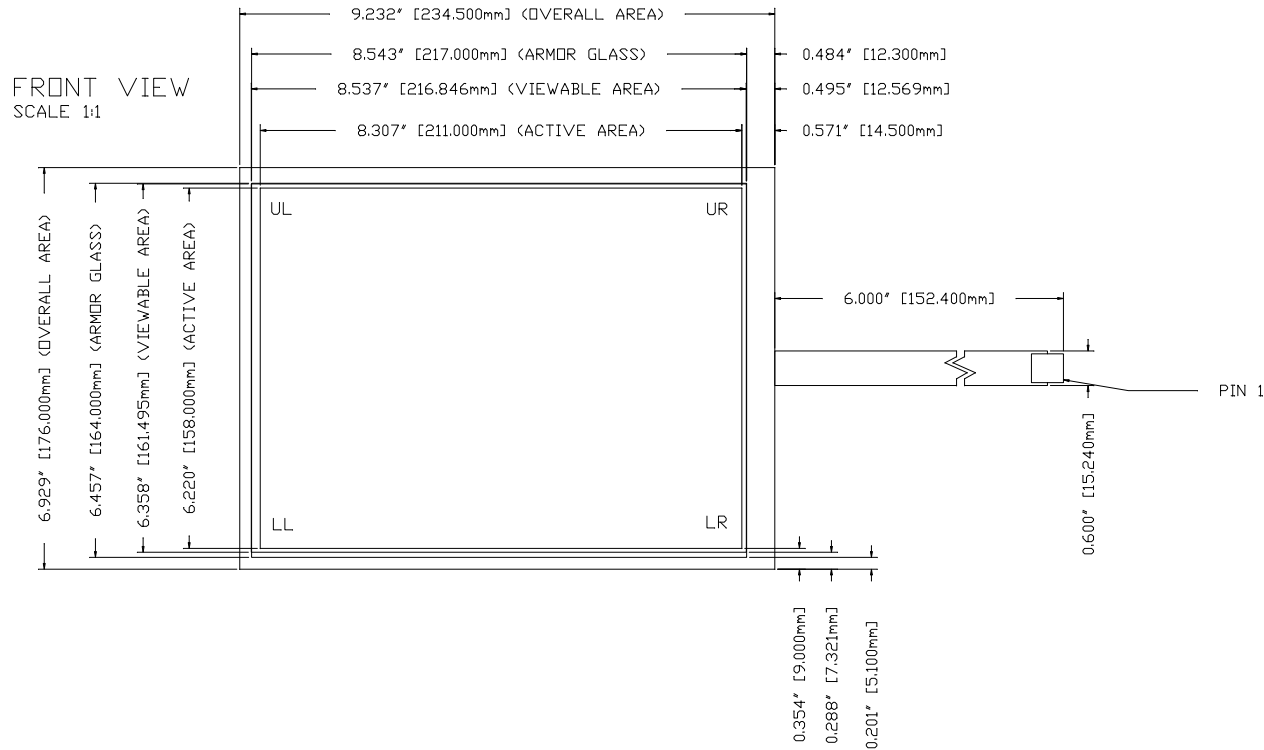


PIN	X1
1	LL
2	UL
3	SENSE
4	LR
5	UR



**NOTES:**

- SUBSTRATE: 3.18MM ITO GLASS
- ALL DIMENSIONS IN INCHES [MILLIMETERS]
- SAFETY SEAM ON ALL EDGES
- CABLE: 5-PIN FFC TYPE
- CONNECTOR: AMP TYPE WITH 0.1" [2.54MM] CENTERS, NON LATCHING, PART NUMBER 487378-4
- TOUCH SCREEN TO BE ACTIVATED WITHIN ACTIVE AREA ONLY. AREA BETWEEN ACTIVE AND VIEWABLE AREAS MUST HAVE A SCREENED ON DIELECTRIC.
- TOTAL SENSOR THICKNESS: 0.142" [3.600MM].
- LINEARITY PATTERN: PEPPER.
- HIGH RESOLUTION ANTI-GLARE MATTE FINISH ARMOUR GLASS SURFACE WITH NOMINAL GLOSS VALUE OF 90 GU.

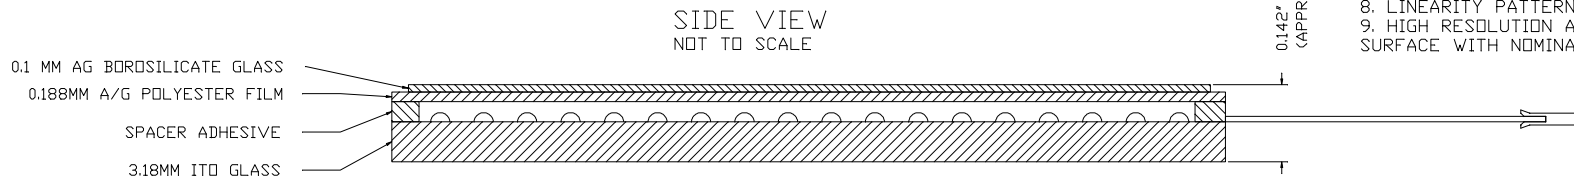

		A D METRO - 1181 PAVENSTON ST - OTTAWA, ONTARIO	
<b>AD10.4ULTRA-AG</b>			
TOLERANCING UNLESS OTHERWISE SPECIFIED XXX ABS HOLEY HDP	DRAWN BY: DJZ DATE: 01-17-10	PROJECT/SHEET No. PROJECT NAME	SCALE: SCALE SHEET: 1 SHEETS: 1
DO NOT SCALE DRAWING		PART NO.	3A99210-AG